

Printing

1. Use "Tile" mode to print on individual pages, then tape together using the diagonal lines for reference
2. Print as a Banner (see other note)
3. Take file to office products store

Banner Setup:

1. Your printer must be capable of having "Custom" Page sizes and feeding them from other than a tray
2. Tape three pieces of paper end to end to form a single 8 1/2 x 33 inch sheet
 - All tape on just one side (Or use Banner Paper, if you can get it.)
3. Feed the paper into the manual feed port with the tape opposite printing side

Actual Process will vary by printer. In general

- Open "Print"
- Select "Actual Size"
- Select "Properties"
- Look for "Document Size Option"
- Select "User Defined" option
- Set custom paper size to 8.5x33
- Print
- Measure/Verify the 26.25" distance



Bowers Fly Baby Middle Rib Template (Ribs 3-11) - build 18


Based on ordinates provided on Page 25 of EAA Sport Aviation Magazine January 1963

Center Axis for Compression Ribs

Grain

26.25 Inches

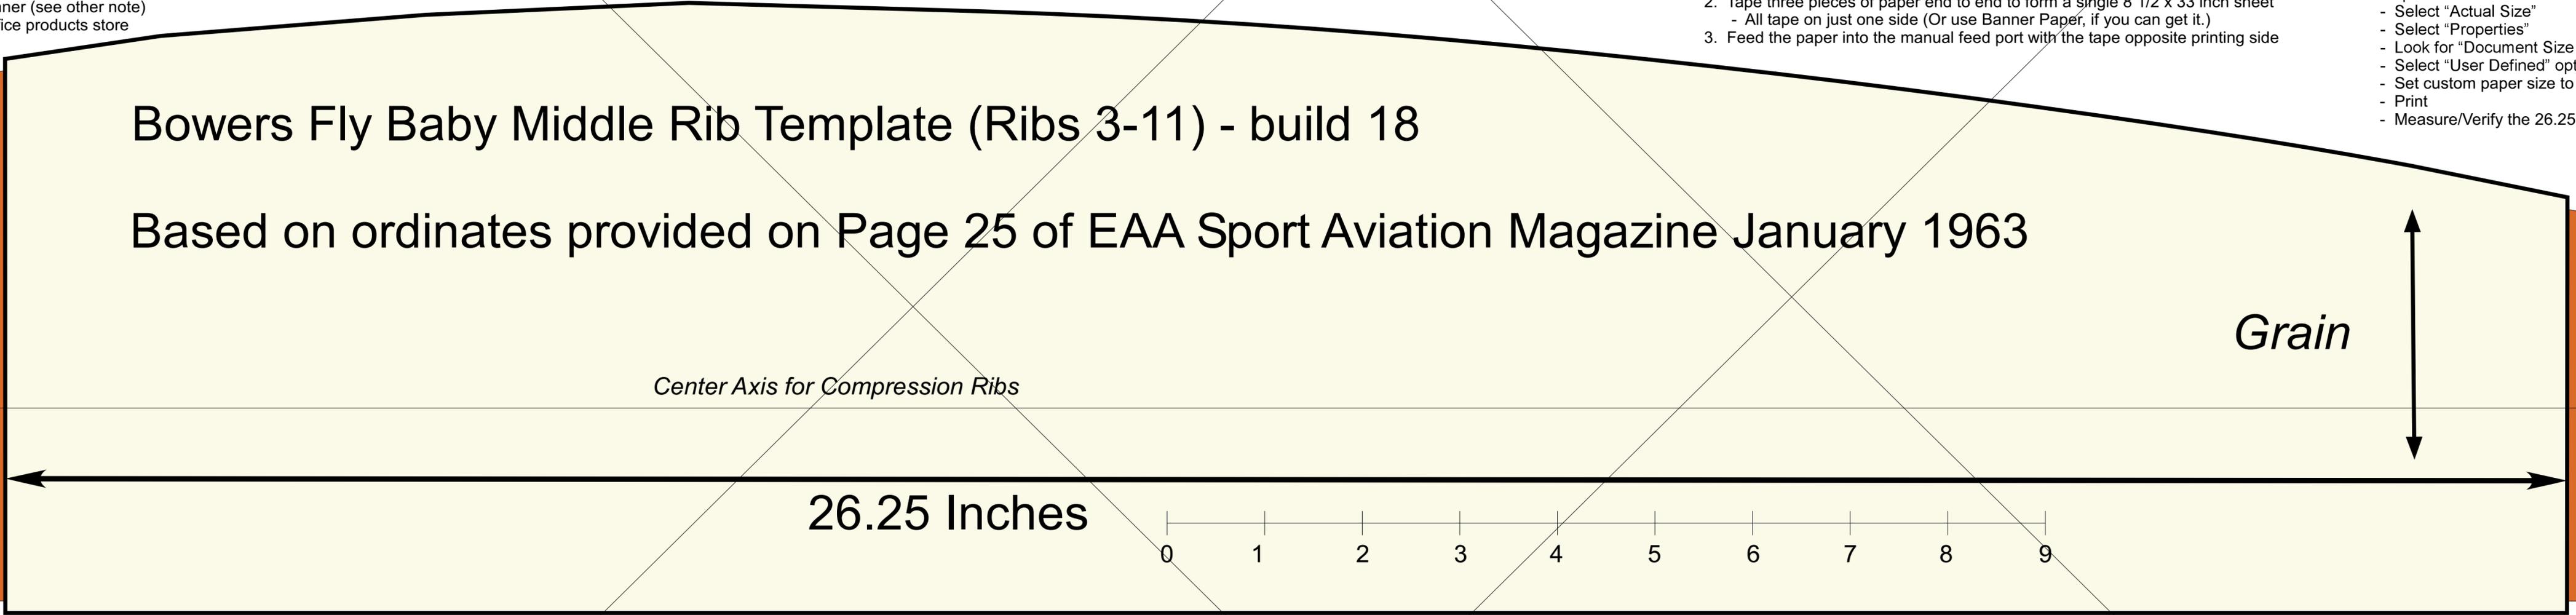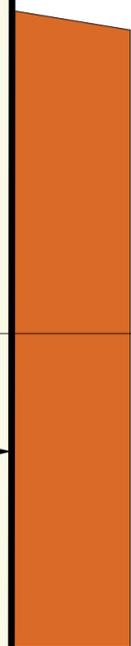

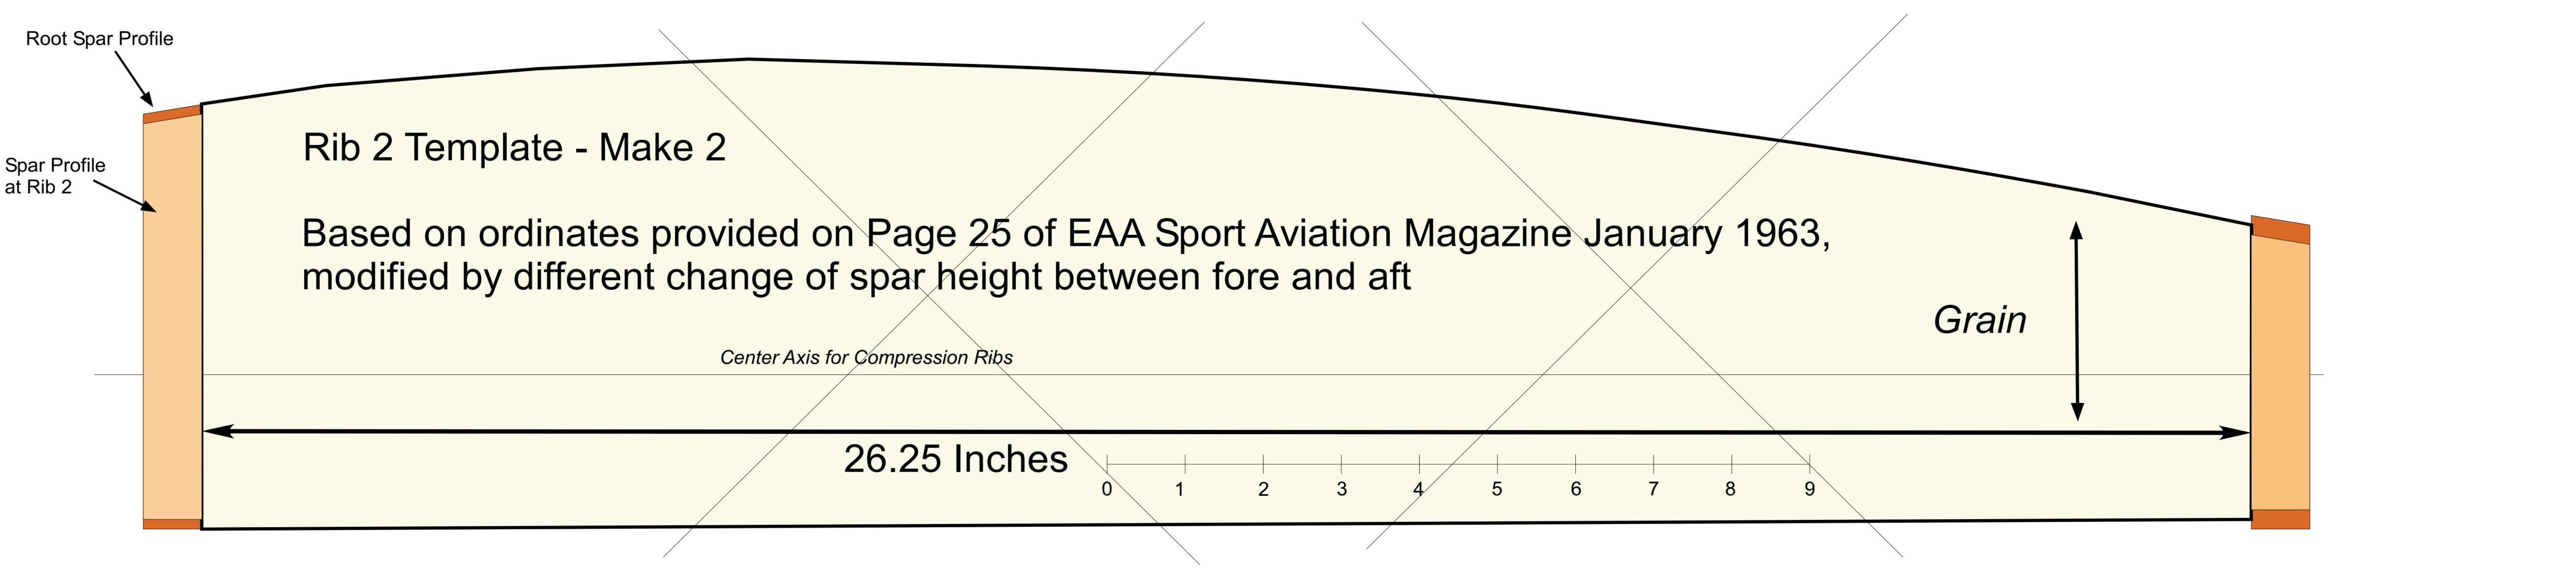

Root Spar Profile

Rib 2 Template - Make 2

Based on ordinates provided on Page 25 of EAA Sport Aviation Magazine January 1963,
modified by different change of spar height between fore and aft

Center Axis for Compression Ribs

Grain

26.25 Inches

0 1 2 3 4 5 6 7 8 9

Spar Profile
at Rib 2

