





Ron Wanttaja
November, 2023

Face Frame (Front/Back)
3/4" Pine/Hemlock

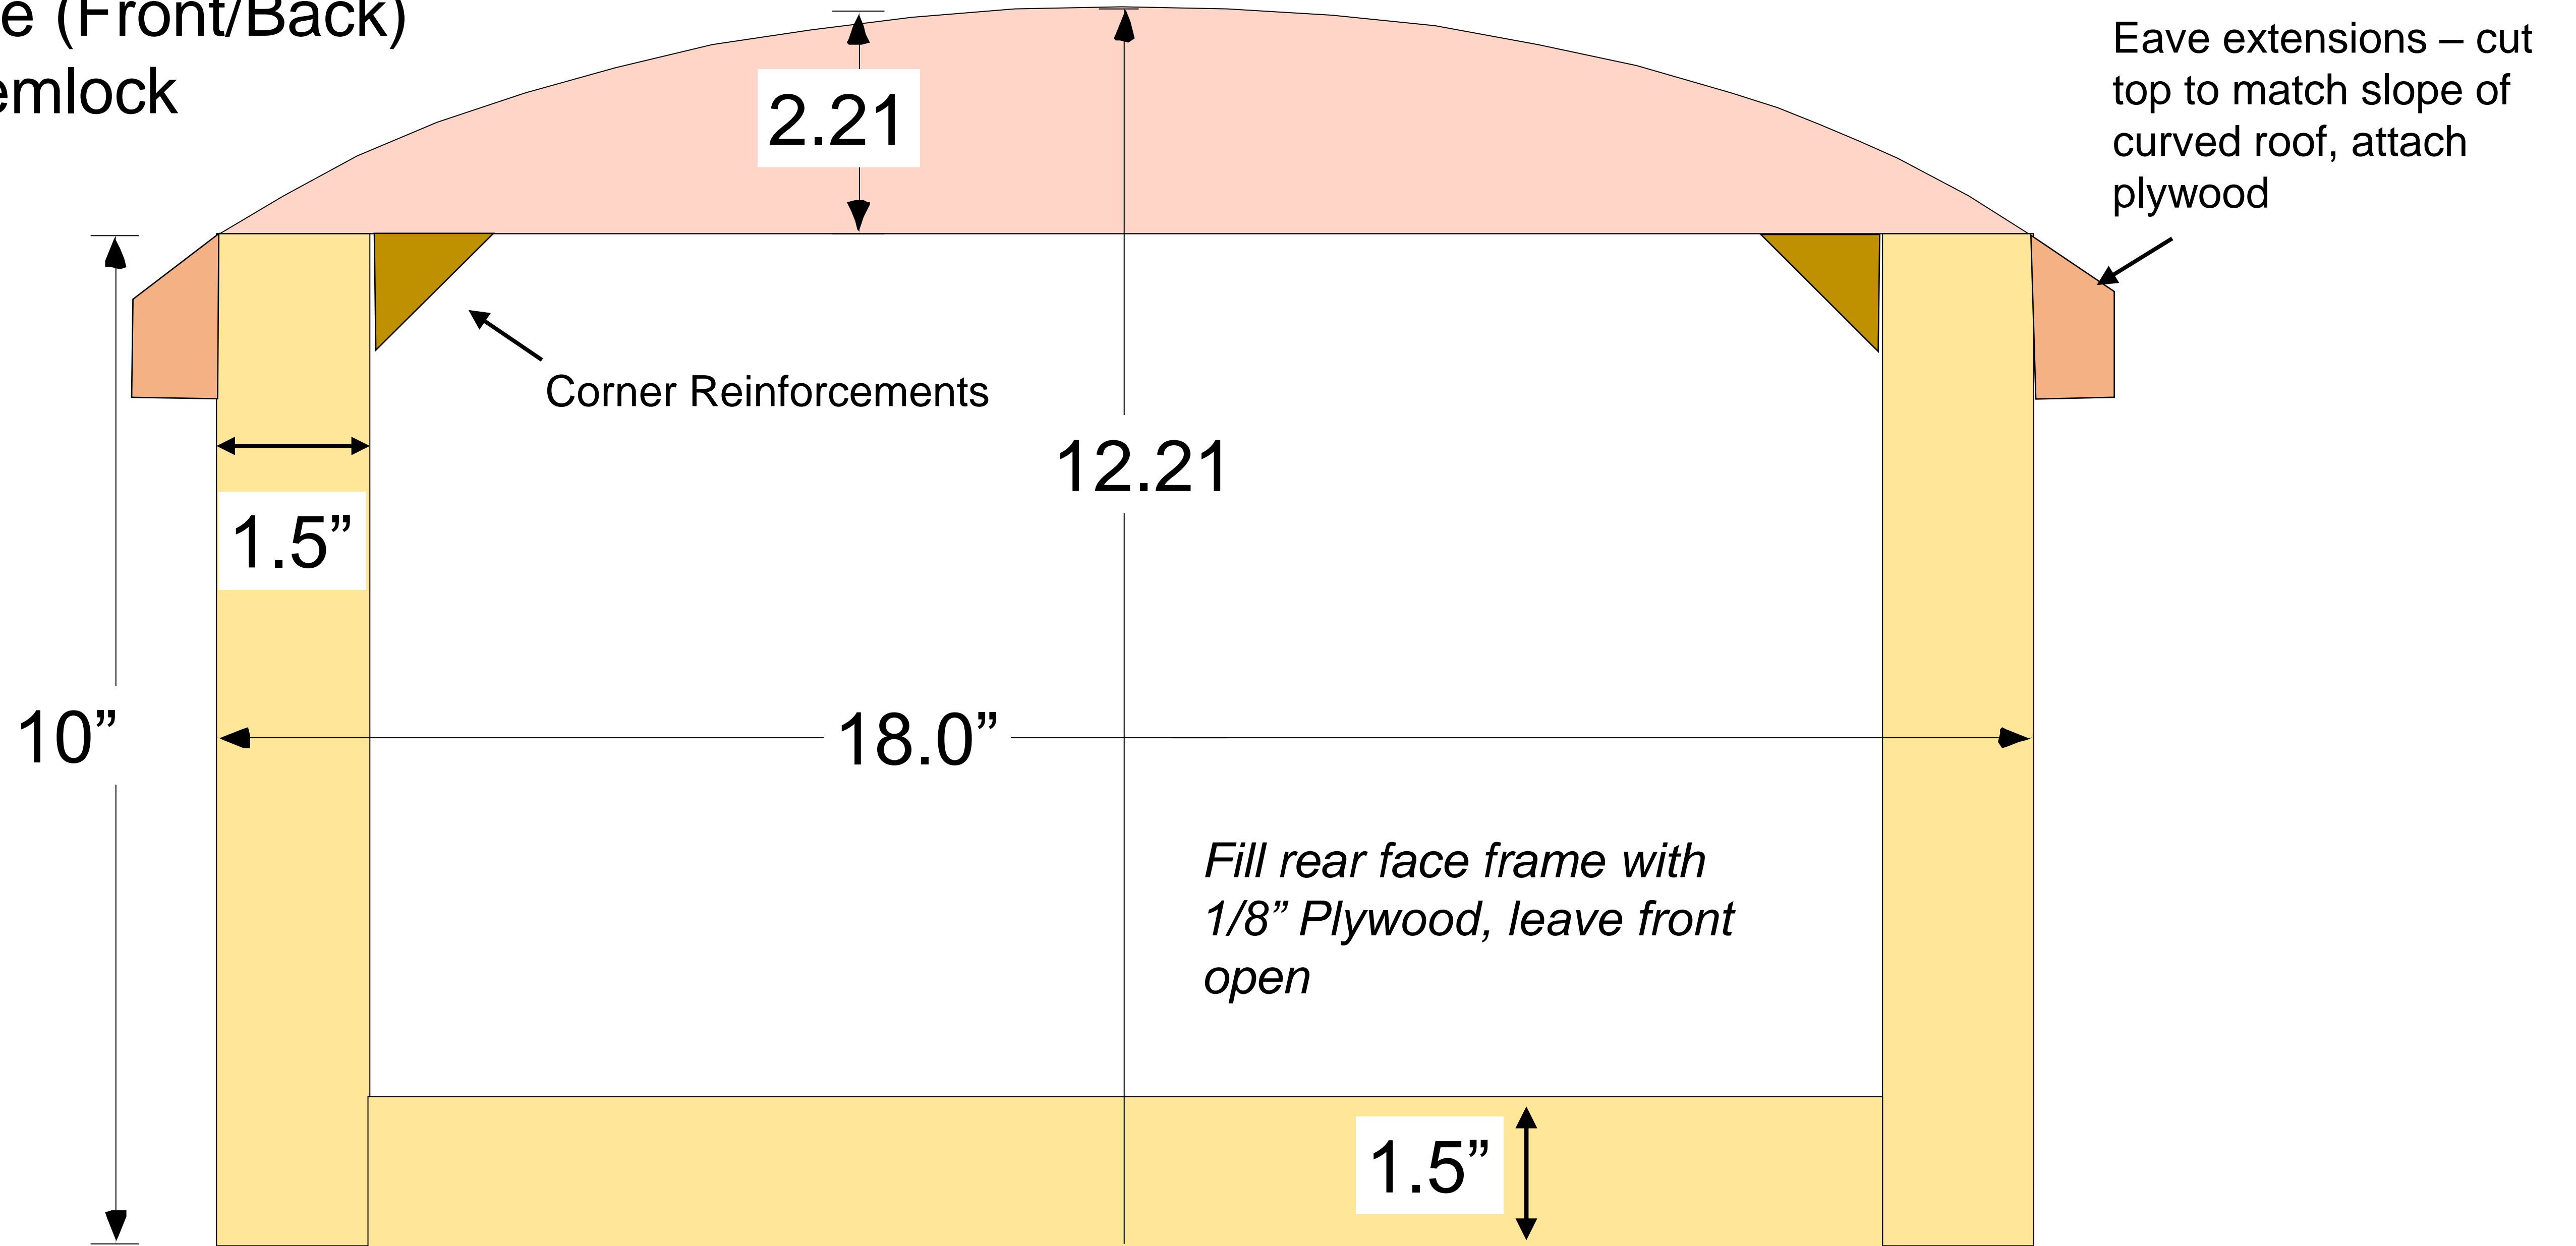

Internal Structure
3/4" Plywood

All 9" Wide

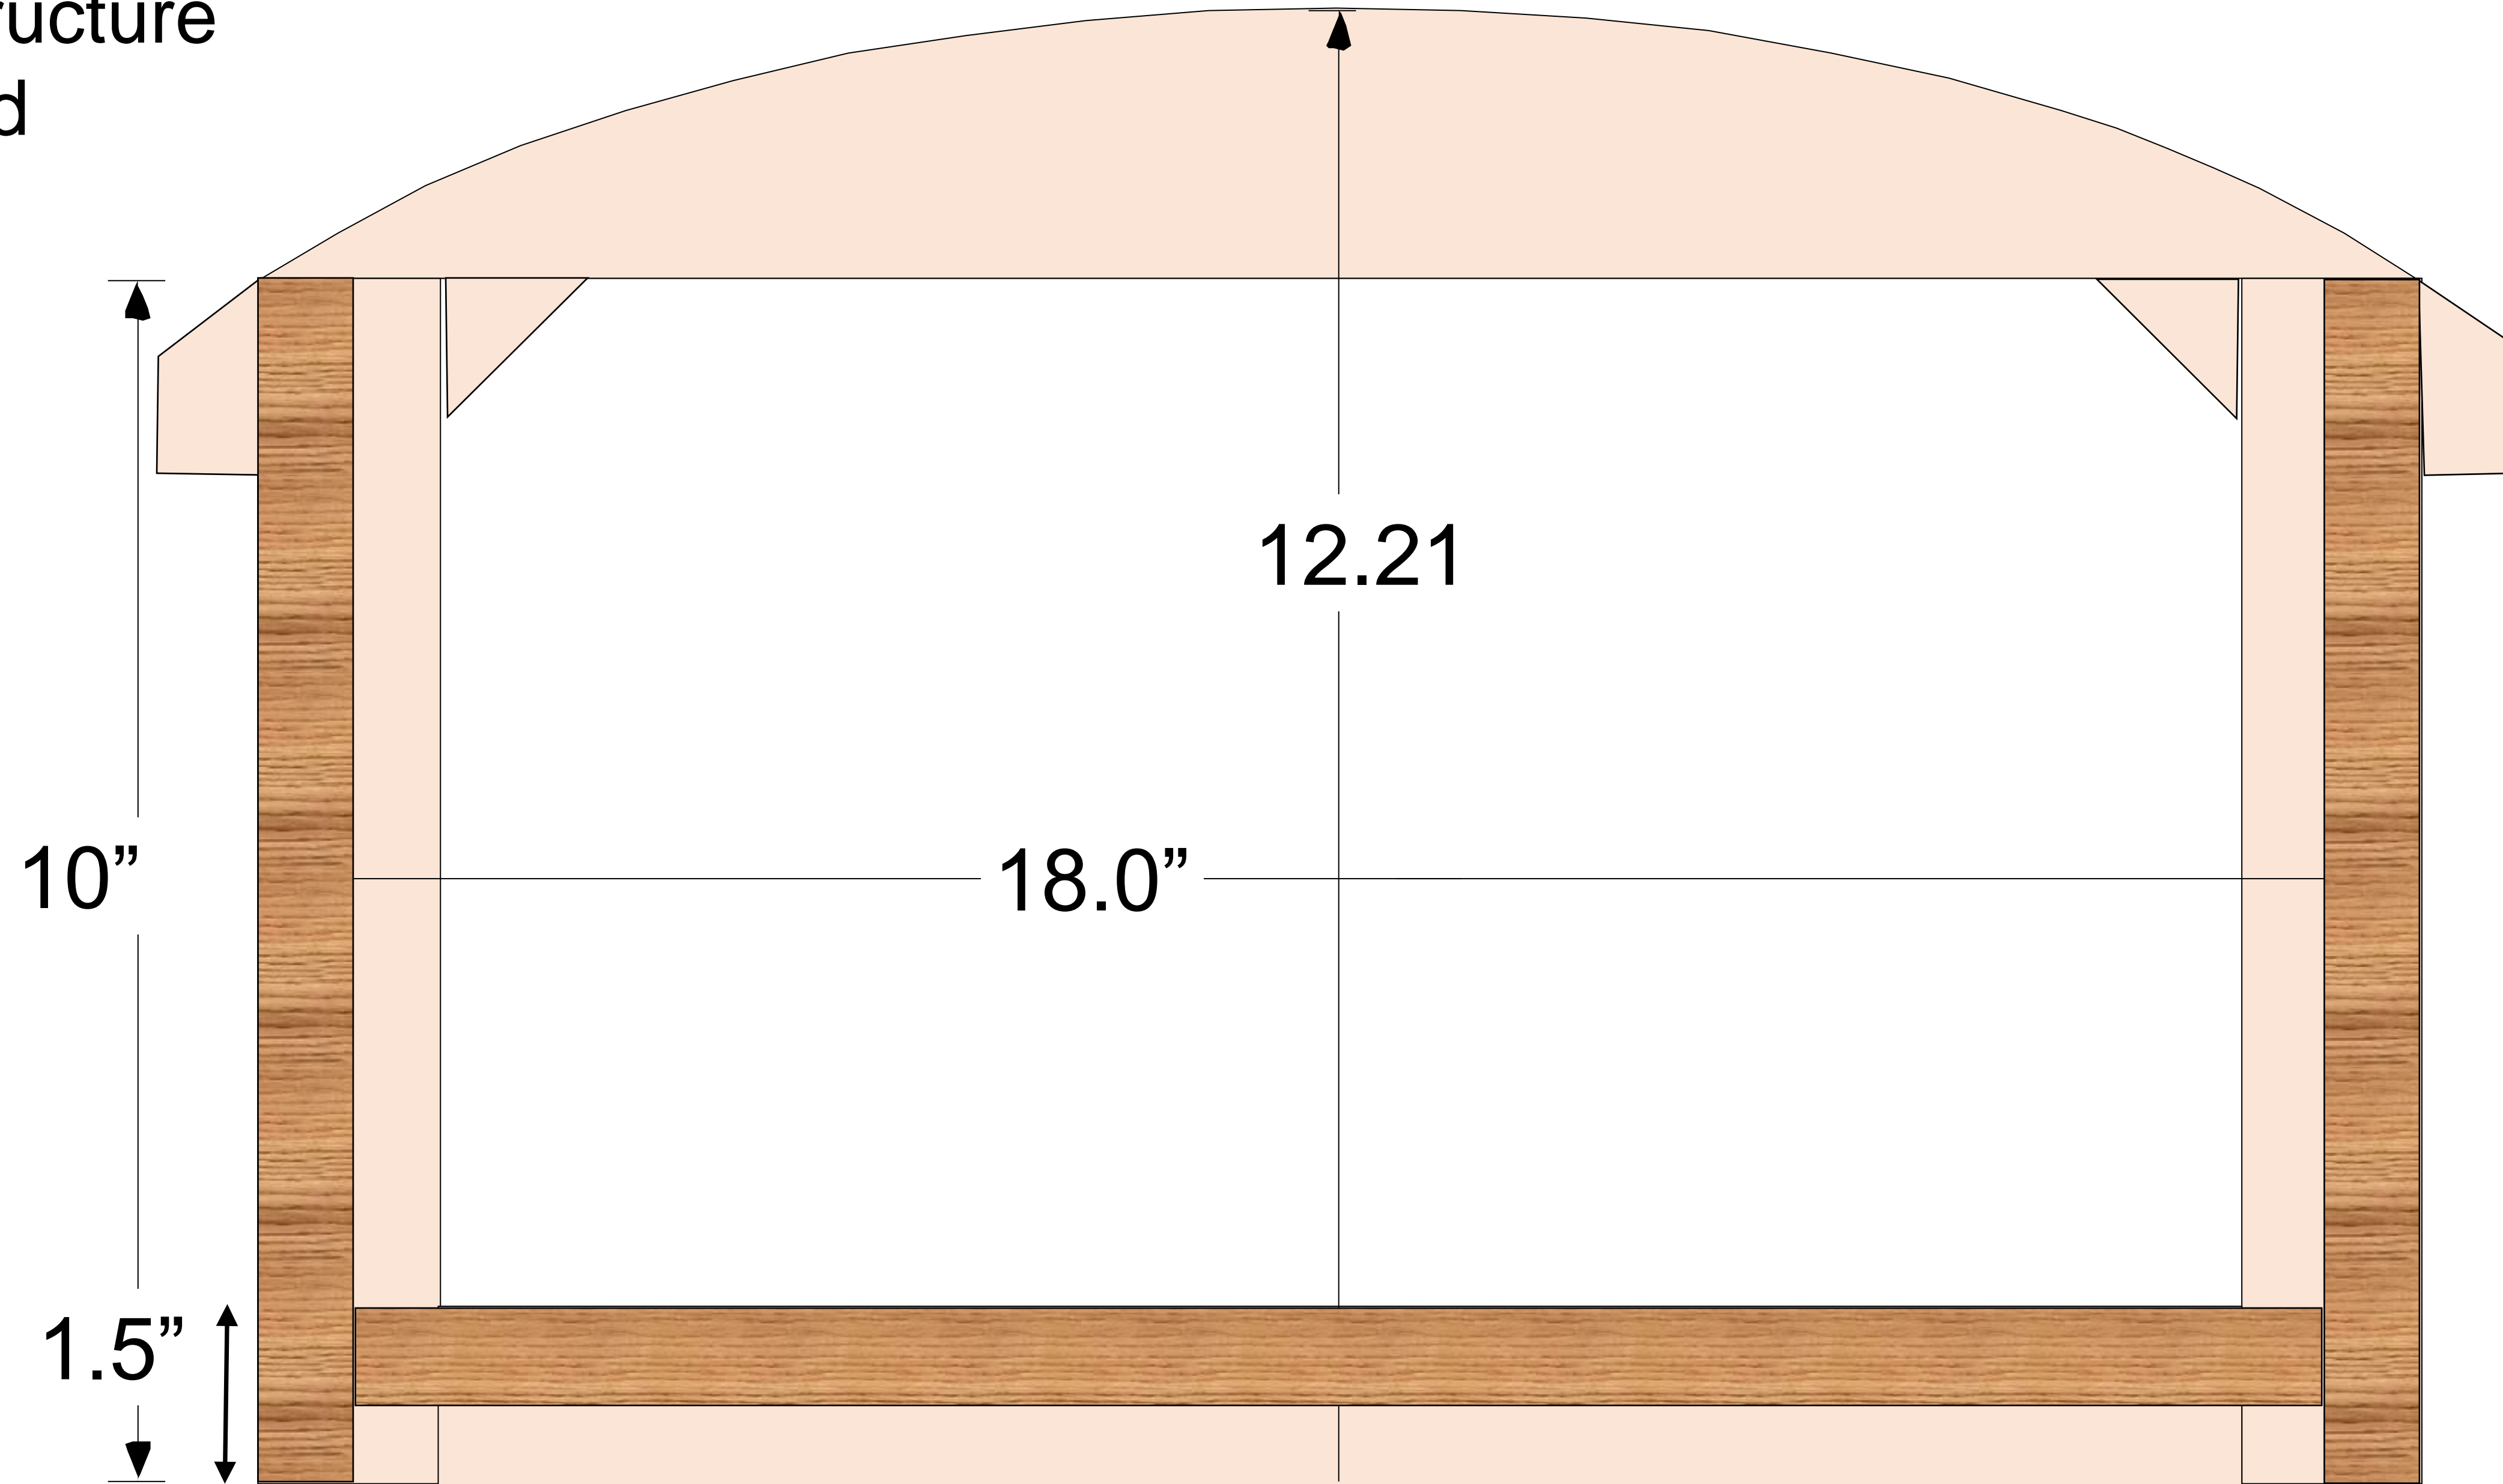

Roof

Roof is 1.5mm Plywood. 22" x 12"

Amazon order:


"Plywood Sheet Board, A Grade, 22 x 12 inch, 1.5mm Thick, Pack of 10 Unfinished for Crafts Basswood by Craftiff"

Size is EXACTLY right for the roof...doesn't need to be cut. Leave overhang for front and back for rain protection

Have clamps and scrap wood ready. Clamp center part of plywood to center of roof, then pour boiling water over the plywood. Clamp while still wet, let dry.

Remove plywood, apply glue, screw plywood to center roof beam, then re-apply boiling water, clamp into place, and attach with screws or staples.

Could use thin aluminum, instead....

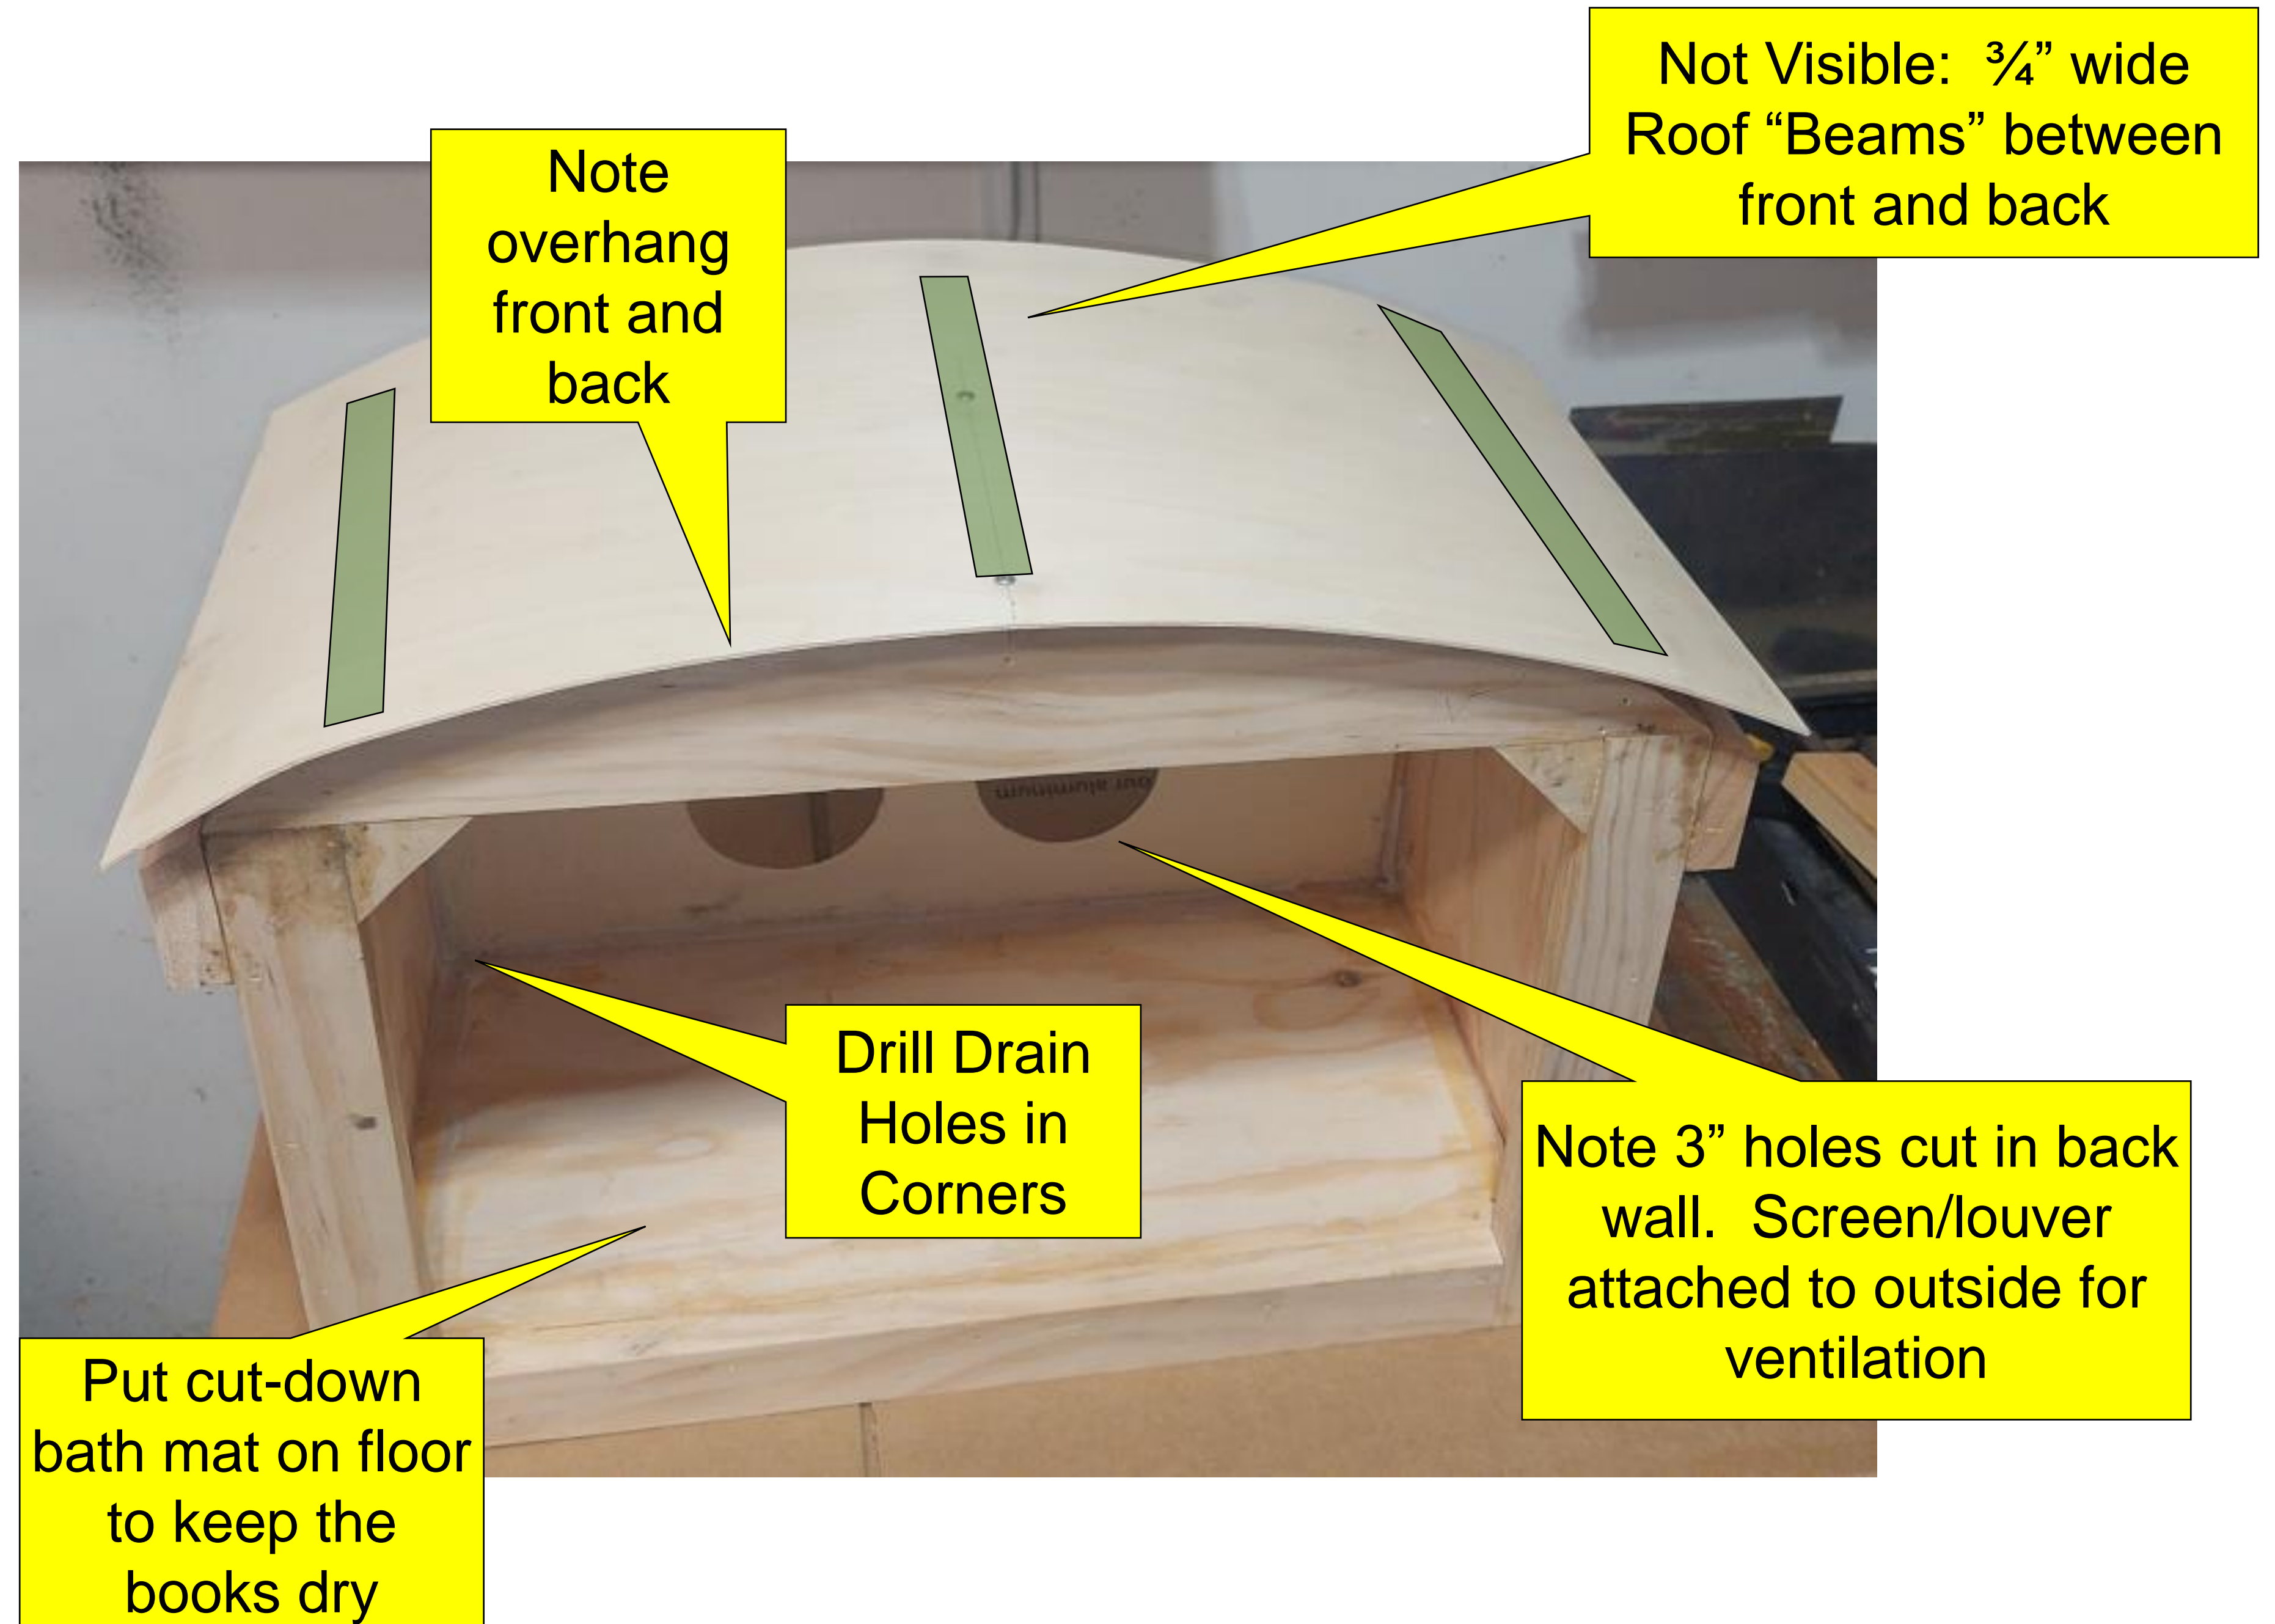

Doors

Will still probably have to trim to the doors so they'll be clear of each other.

Bubble-type shower mat on the bottom to keep books a bit elevated from the base.

Paint as desired. Original was painted with latex, with the roof spray painted with simulated steel color.

